



Titanium coated



UV Protection



Long Lasting Colour Life



Anti-Microbial



Weldable with Wrinkle Free Finish



Easy Maintenance



Stability






TECHNICAL SPECIFICATIONS


Quality	JDS 2010
Weight	600 gsm
Width	152 cms
Operating Temperature	-30° C to +70° C
Adhesion	9daN / 5 cm
Tensile Strength	Warp 220, Weft 220
	IS: 7016 - Part II (kgf / 5cm)
Yarn	1100 D Tex High Tenacity Polyster
Tear Strength	Warp 20, Weft 20, BS-3424 (Kgf / 5cm)
Light Fastness	Class 6 / 7
Finish	Glossy

Note: Technical data are average $\pm 10\%$. The above mentioned data is of no legal binding.

APPLICATIONS




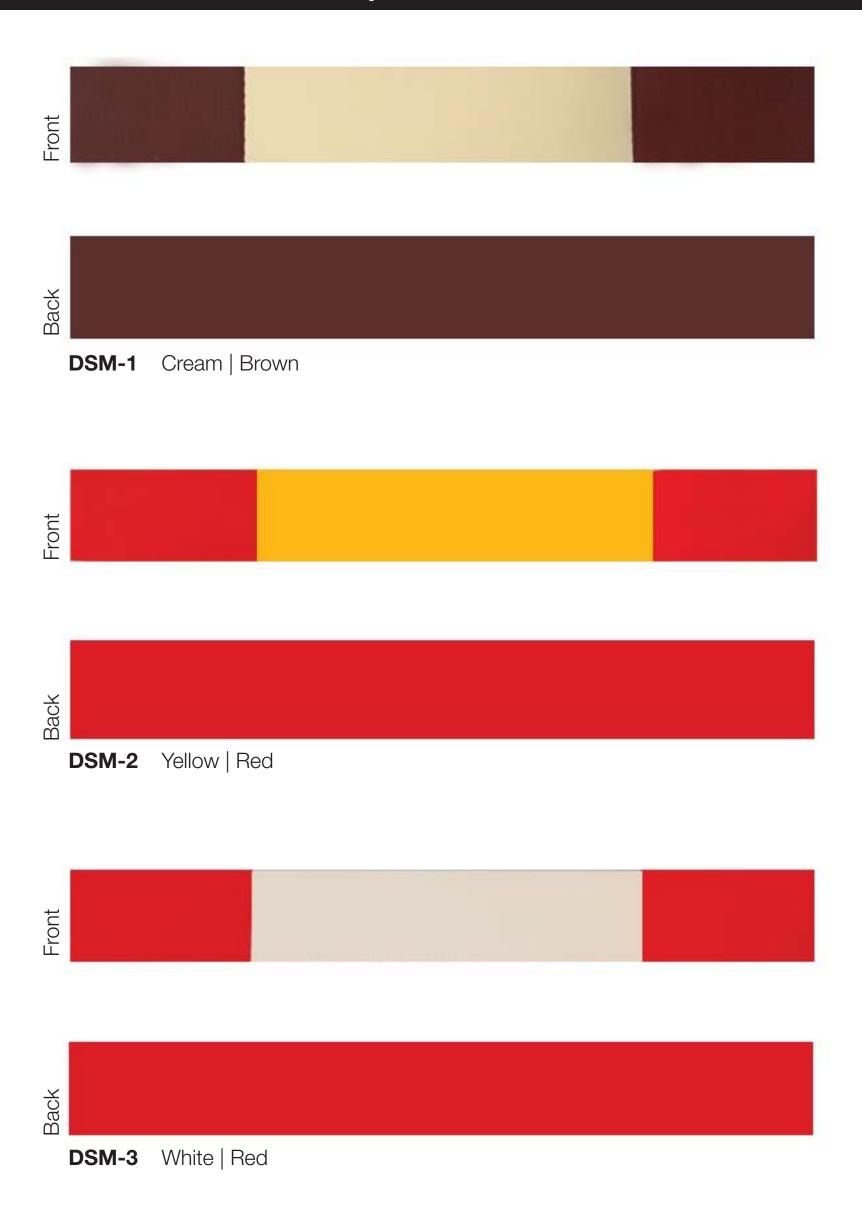

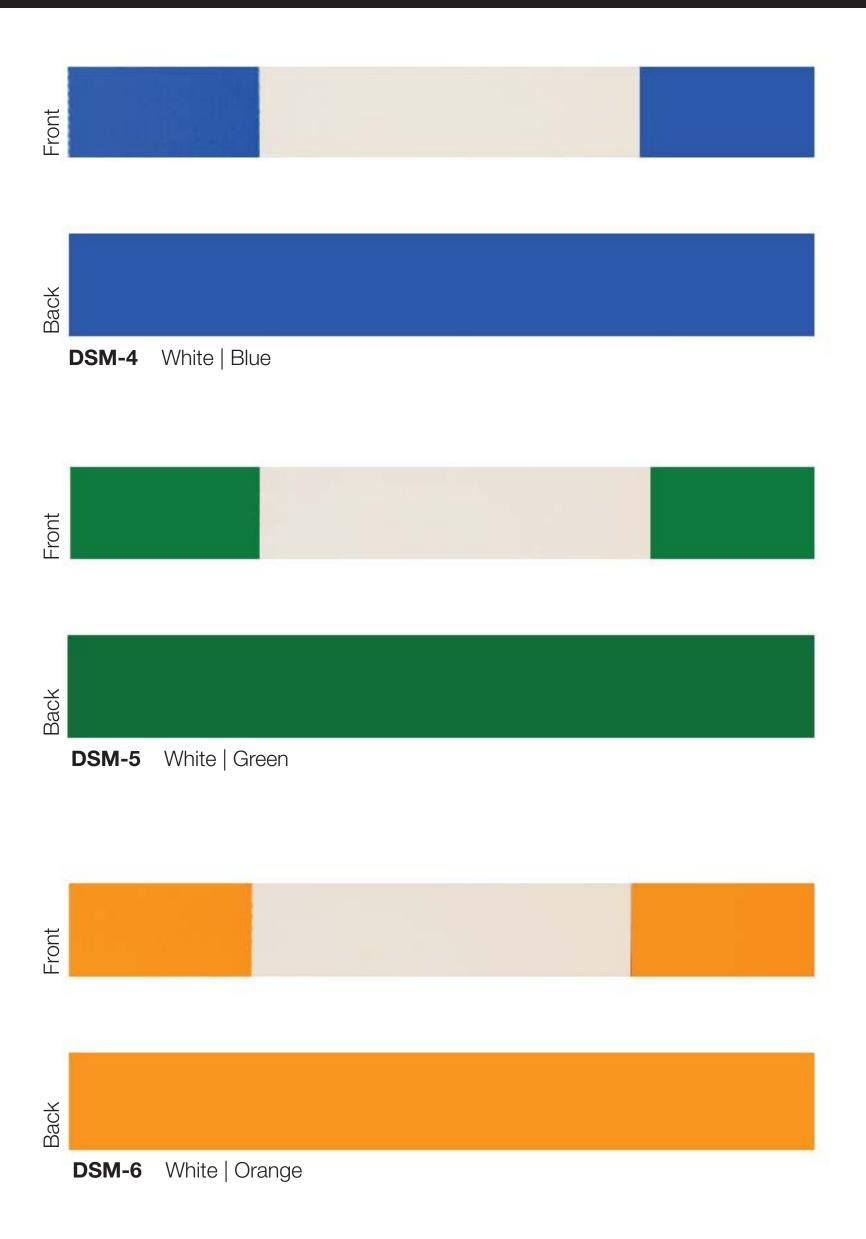




BACK: MONO COLOURS FRONT: STRIPES

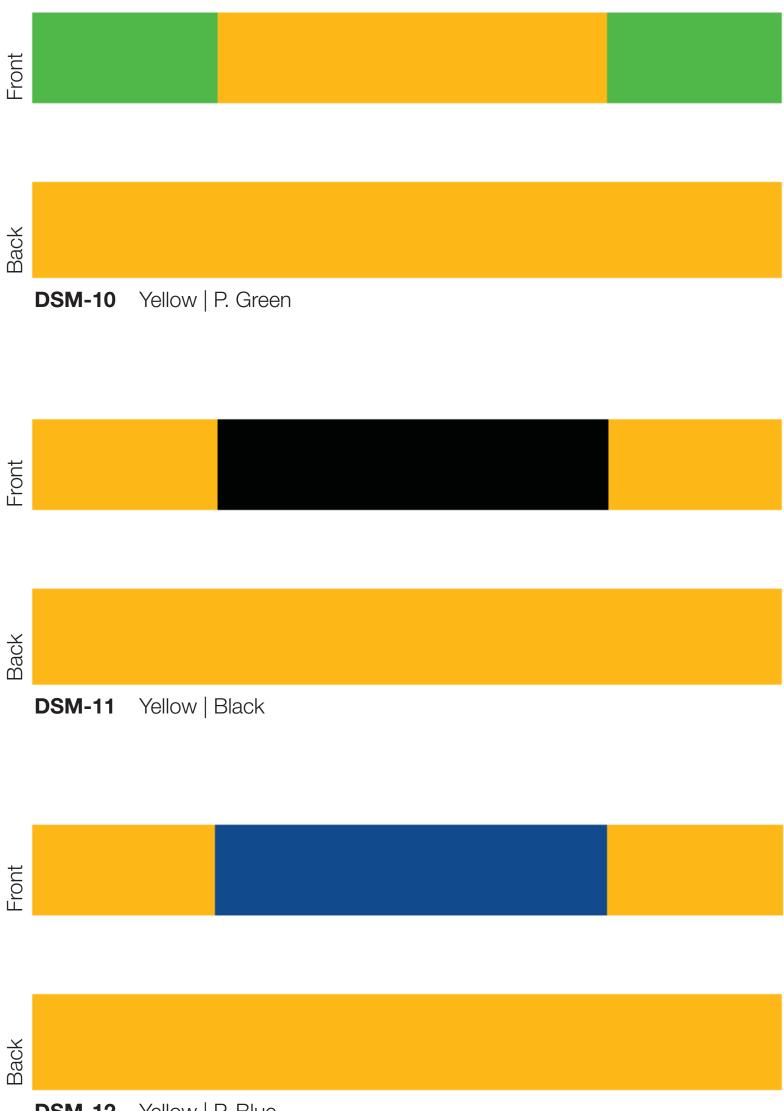

DSM-12 Yellow | P. Blue

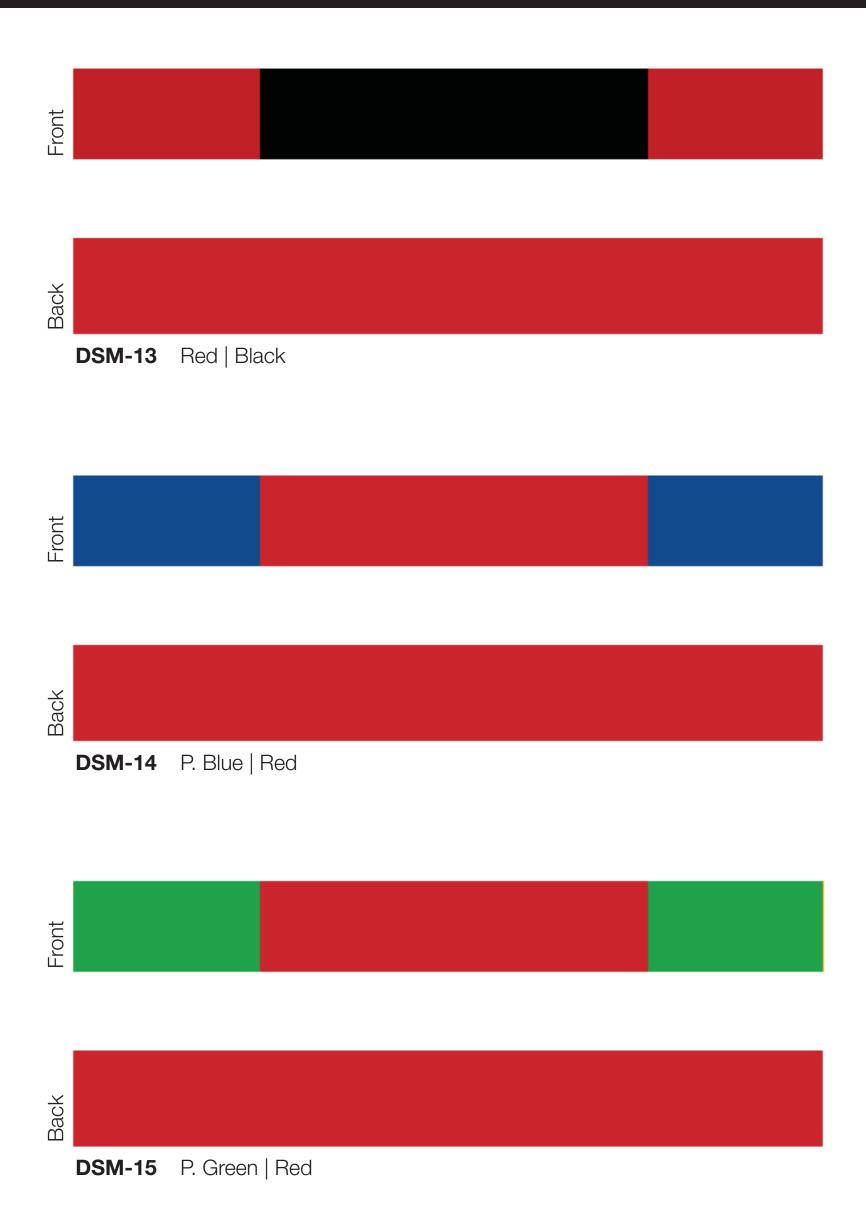



DSM-16 S. Blue | P. Blue





Coated Sales Company Private Limited

Office: 453D Chikhal house, behind Trinity Electric

Princess Street, Mumbai 400 002.

Factory: C1/1304/14, GIDC 3rd Phase

Near Micro Inks Gate No. 2, Vapi 396 195

Gujarat, India.

Contact: +91 86919 02655 | +91 70211 35419

+91 98208 02363

Email: cscpl@yahoo.com | cscplsales@gmail.com

www.coatedsalescompany.com