





HIGH PERFORMACE



UV













Titanium coated

Protection

Long Lasting **Colour Life**

Anti-Microbial

Weldable with Wrinkle **Free Finish**

Easy Maintenance Stability



Scan or click on the QR code to visit the website

Coated Sales Company Private Limited www.coatedsalescompany.com



TECHNICAL SPECIFICATIONS


Quality	JHS 2005
Weight	600 gsm
Width	152 cms
Operating Temperature	-30° C to +70° C
Adhesion	9daN / 5 cm
Tensile Strength	Warp 220, Weft 220
	IS : 7016 – Part II (kgf / 5cm)
Yarn	1100 D Tex High Tenacity Polyster
Tear Strength	Warp 20, Weft 20, BS–3424 (Kgf / 5cm)
Light Fastness	Class 6 / 7
Finish	Glossy

Note: Technical data are average ±10%. The above mentioned data is of no legal binding.

APPLICATIONS



STRIPES COLOUR CHART

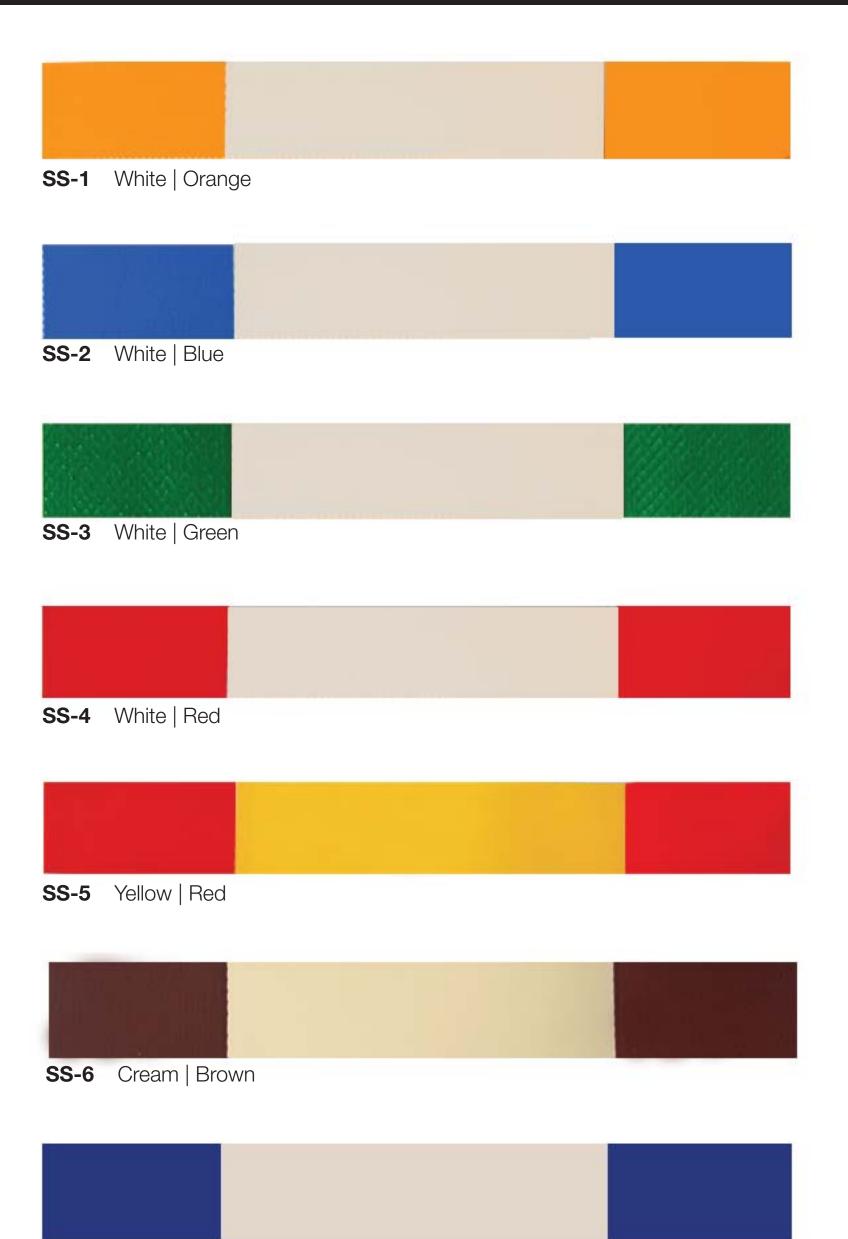





Coated Sales Company Private Limited

- Office: 453D Chikhal house, behind Trinity Electric Princess Street, Mumbai 400 002.
- Factory: C1/1304/14, GIDC 3rd Phase Near Micro Inks Gate No. 2, Vapi 396 195 Gujarat, India.
- **Contact:** +91 86919 02655 | +91 70211 35419 +91 98208 02363
- **Email:** cscpl@yahoo.com | cscplsales@gmail.com

www.coatedsalescompany.com