

ESTD,1950

WAP

ARS



Double Side PVC COATED HIGH TENACITY POLYSTER RIBSTOP FABRIC

Quality - NPDR 110 & 100



Scan or click on the QR code to visit the website



Long Lasting Colour Life








Coated Sales Company Private Limited www.coatedsalescompany.com



TECHNICAL SPECIFICATIONS

PROPERTIES	TEST METHOD	NPDR 110 – RESULT	NPDR 100 – RESULT
Coating	-	Both Side PVC	
Base Fabric	-	High Tenacity Polyester Ripstop	
Denier	-	420 D	210 D
Weight	DIN 53353	300 gm / sq.m	230 gm / sq.m
Tensile Strength	IS : 7016 – Part-II	220 / 160 kgf / 5 cm	160 / 130 kgf / 5 cm
Tear Strength	BS 3424	25 / 20 kgf	10 / 12 kgf
Adhesion Strength	-	Layers cannot be separated	
Cold Resistance	-	-20° C	
Heat Resistance	-	+70° C	
Light Fastness	Blue Wool Rating	Class 6 / 7	
Technical Features	-	UV Protected, Weather Proof, Color Fastness, Long Lasting	

Note: Technical data are average ±10%. The above mentioned data is of no legal binding.

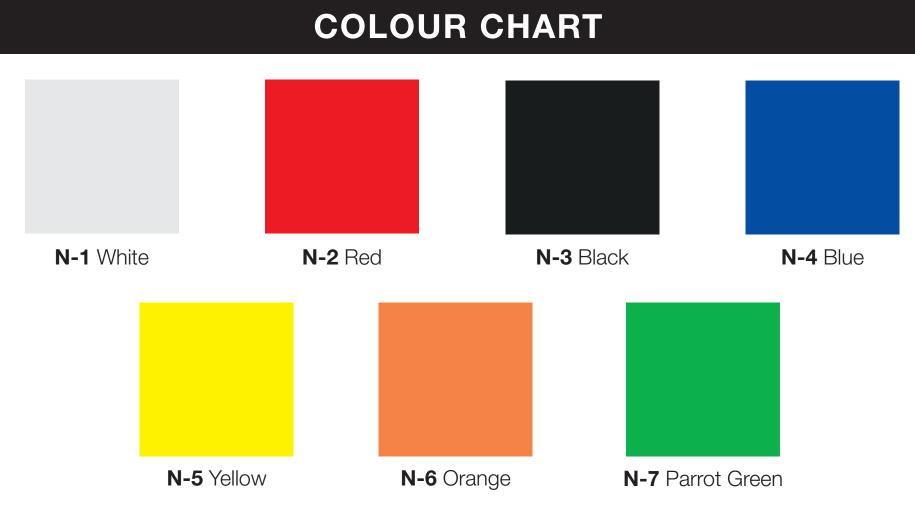

Note: Customised colours and Pantone shades as per order.

APPLICATIONS

INFLATABLES | BELLOWS | HOSE PIPES | SUNSHADES







Coated Sales Company Private Limited

- Office: 453D Chikhal house, behind Trinity Electric Princess Street, Mumbai 400 002.
- Factory: C1/1304/14, GIDC 3rd Phase Near Micro Inks Gate No. 2, Vapi 396 195 Gujarat, India.
- **Contact:** +91 86919 02655 | +91 70211 35419 +91 98208 02363
- **Email:** cscpl@yahoo.com | cscplsales@gmail.com

www.coatedsalescompany.com